


JIS Tip Glob Vana (Gönye Tip)

JIS Type Globe Valve (Angle Type)

Uygulama Alanları / Applications

Yakıt yağ devrelerinde, su ve buhar hatlarında kullanılır

Preventing reflux in fuel oil, lubricating oil water and steam piping at or under the temperature of 205 °C. The flange dimensions are according to JIS B2220 standart of steel pipe

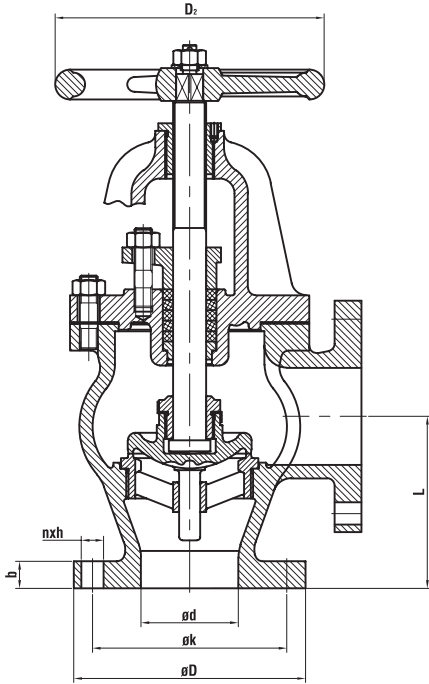

NO	PARÇA ADI	PART NAME	MATERIAL
1	GÖVDE	BODY	GG 25
2	CONTA	GASKET	KLINGRIT
3	KAPAK	COVER	GG 25
4	MİL	STEM	AISI 420 / CuZn39Pb3
5	EMNİYET PULU	DISK LOCK WASHER	CuZn39Pb3
6	KLAPE SOMUN	DISC NUT	AISI 420 / CuZn39Pb3
7	SIZDIRMAZLIK BİLEZİK	SEALING RING	AISI 420 / CuZn39Pb3
8	KLAPE	DISC NUT	AISI 420 / CuZn39Pb3
9	CİVATA	BOLT	STEEL
10	SALMASTRA	PACKING	GRAPHITE
11	SALMASTRA BURCU	PACKING BUSH	CuZn39Pb3
12	GLEN	GLAND	GG 20
13	CİVATA	BOLT	STEEL
14	PUL	WASHER	STEEL
15	CİVATA	SCREW	STEEL
16	KAPAK MİL BURCU	SCREWED BON. BUSH	CuZn39Pb3
17	HENDİL	HANDWHEEL	GG 20
18	KOPİLYA	SPLIT PIN	CuZn39Pb3
19	SOMUN	NUT	STEEL

ÖLÇÜ	FLANŞ JIS 5K								FLANŞ JIS 10K						
	Ød	ØD	Øk	b	nxØh	L	ØD2	KG	ØD	Øk	b	nxØh	L	ØD2	KG
50A	50	130	105	16	4x15	100	160	13	155	120	20	4x19	120	160	18
65A	65	155	130	18	4x15	115	180	18	175	140	22	4x19	130	200	25
80A	80	180	145	18	4x19	130	180	23.5	185	150	22	8x19	140	200	27
100A	100	200	165	20	8x19	150	224	34	210	175	24	8x19	160	250	41
125A	125	235	200	20	8x19	170	250	46	250	210	24	8x23	180	280	70
150A	150	265	230	22	8x19	190	280	63.5	280	240	26	8x23	205	315	81
200A	200	320	280	24	8x23	220	315	105	330	290	26	12x23	213	355	125
250A	250	385	345	26	12x23	275	355	176	400	355	30	12x25	290	450	211
300A	300	430	390	28	12x23	310	400	243	445	400	32	16x25	320	500	-
350A	350	480	435	30	12x25	360	500	-	490	445	34	16x25	360	560	-
400A	400	540	495	30	16x25	395	560	-	560	510	36	16x27	420	630	-